


Cat.08

SŁOKY®

Smart Torque
Everywhere Possible



Torque Tool & Screwdriver

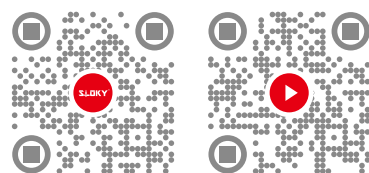

www.fractalnost.com.ua

Application Unlimited

SLOKY® torque tool can be customized to a desired torque value or different shapes to assist users in attaining more accurate fastening. Easy customization, always secure your product quality!



Tool Holder & Cutting Tool

The SLOKY® torque screwdriver allows any technician to deliver the correct torque to the screws which can secure repeatable and accurate clamping. Properly clamping the fixture directly influence the accuracy, quality and production.



Torque range : 0.1~18.0 Nm

Smart Torque Everywhere Possible

Features :

- No over and under tighten
- "Click" sound
- Precise torque accuracy
- Color identity
- Patented

Specification :

- Torque range: 0.1~18.0 Nm
- Connecting and driving portion can be designed by request.



Electronic Devices

Choosing the accurate preset torque and reliable tool for assembly line can optimize productivity and quality as it can reduce defected products and minimize production downtime.



Torque range : 0.1~6.0 Nm

Construction

The SLOKY® torque screwdriver allows any user to deliver the correct torque with confidence in various fastening applications regardless of operator skill levels. Easy & Simple!



Torque range : 0.6 ~ 18.0 Nm

Micro-Technology

The specification of the micro-technology torque range has been carefully created to satisfy your needs. It optimizes assembly of small torque applications : watches, glasses, jewelry, and other tiny products.



Torque range : 0.8 cNm~6.0 Nm

Medical

Medical technology demands exceptional quality everytime whether you use bone screws, implants, prostheses or other medical devices. Precise torque control like SLOKY® torque tool plays a crucial foundation.



Torque range : 0.1~6.0 Nm



No Over Tighten,
torque remains the same
value once reach the
demand torque.
No increase, No drop.



A "Click" sound when the
demand torque is reached.



Reversible system.
30% higher torque for
loosening.



Fasten and loosen
by same tool, no need
to change.

Sports


More and more modern sports equipment adopts lightweight components which require specific tension and tightening for each screw on the equipment, and doesn't come loose when you are playing.



Torque range : 0.1~18.0 Nm

Fastener & Hardware

Only the exact torque guarantees a secure fastening as well as a quick and easy loosening. SLOKY® torque tool has a reversible system which can use the same screwdriver for tightening and loosening the screws.

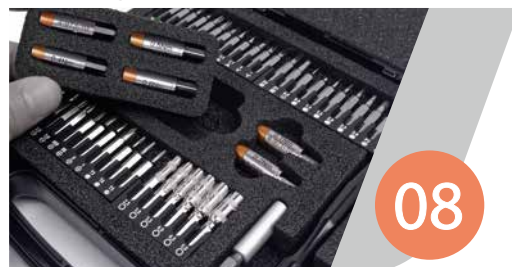

Torque range : 0.1~18.0 Nm



Select Nm

S



Length of bit

L



Ok to go

O



Keep tightening

K



Yes it's done

Y



About Us

“SLOKY®” comes from the meaning of “SOLO KEY” in Taiwanese dialogue.

It is defined from the position of patented adapter in torque screwdriver system as a solo performer.

Patented adapter plays as a solo performer, with a unique feature to build whole product system.

The torque's value is setting on the adapter; complied with various bits and handles become torque screwdrivers for tighten or loosen the screw.

Sloky torque screwdriver, a predicable, replaceable and organized tool.

It is considering to be used in industrial field having a greatest advantage of “no-over tighten”.

It prevents the damages of the screw and tool, in addition it provides a replaceable function to fit with driver bits having different shape and dimensions.

Smart Torque
Everywhere
Possible

Adapter
Custom
Design

Predictable

- When the demand torque is reached, there is a click sound. For continued tightening on the screw, it is no longer to increase the torque on the screw.
- It has a reversible system to use the same screwdriver for tightening and loosening the screw.
- The limit of loosening torque is larger than the tightening torque to protect both tool and the screw from the breaking or damage.
- Fasten or loosen the screws quickly.
- Torque tested to DIN EN ISO 6789.




Replaceable

- Not only the bit, the torque adapter is also replaceable.
- Light and precise! Ideal as economic torque screwdriver.
- Fitting with a universal handle, the most compact size of torque screwdriver in the world is built.
- The cost of the torque adapter is lower in comparison with other brands.
- Different torque value preset adapter is available on request.
- Ergonomically refined design.
- Color recognition.

Organized

- Persisting highest quality to supply SLOKY products and services to meet customer's satisfactions.
- Accomplishing customer's requirements by professional technology.

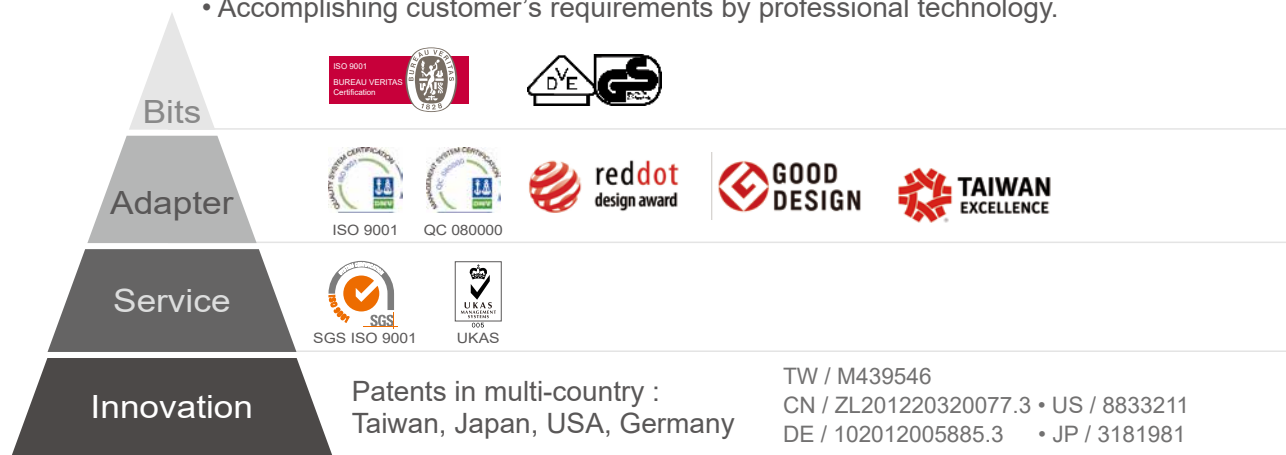



Interchangeable system



Step 1

Torque adapter

Identify the torque range you need to apply



Step 2

Handle

Choose the most suitable handle



Step 3

Bits


Select the bits that works best for you

Application Unlimited, Smart Torque Everywhere Possible.

One system with 3 Handles, 12 Torque, TX/IP/HEX, 25/50/75mm bits, 324 combos !!

Not only the bits and handle, the torque adapter is also interchangeable!

Specially compiled sets for every job, for Custom Design to meet your specific applications.

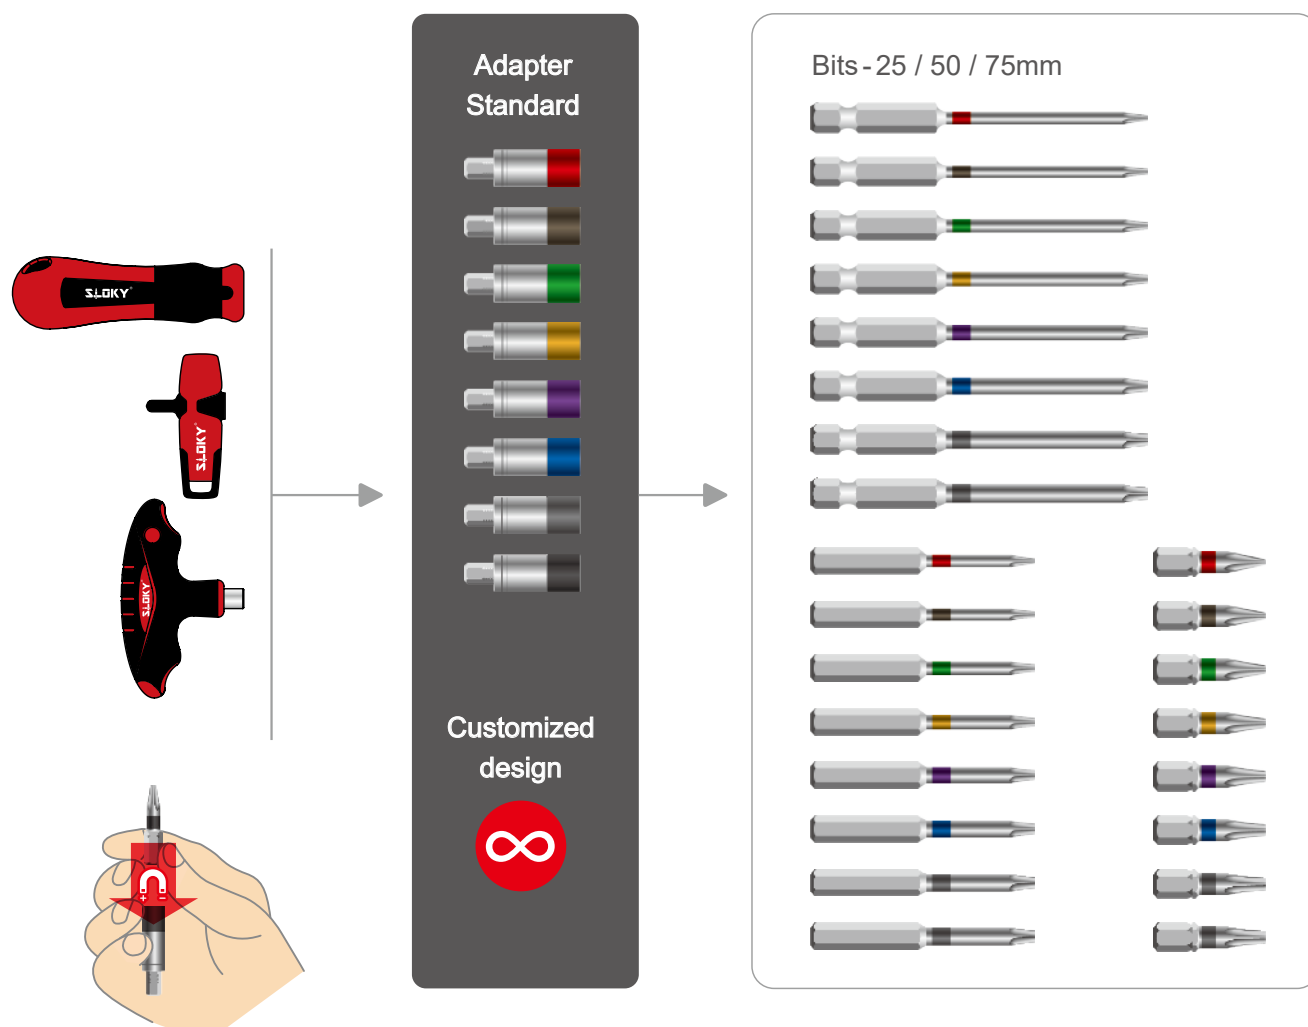








Simple operation

All adapters with magnet, the bits can be inserted and automatically locked into the adapters.


















Contents

			Page
Adapters		General Use Torque Adapter 	0.6 ~ 5.7 Nm 08
		Small Torque Adapter 	0.1 ~ 0.7 Nm 08
		Extend Torque Adapter 	6.0 ~ 18.0 Nm 09
		Mini Torque Adapter 	10 ~ 70 cNm 10
		E6.3 Quick Change 	2.0 ~ 5.0 Nm 11
		5in1 Multi-Torque Adapter 	2 / 3 / 4 / 5 / 6 Nm 11
		Special Inquiry	12

Handle		Universal Handle 		13
		Slim-Fit Handle 		
		T Flying Handle 		
		Mini Handle 		

Bits		TORX® 	16
		TORX PLUS® 	17
		HEXAGON 	18

Kits		Pro Station 19		Togo Kit 20		Work Station 21
						
		Single Set 22		Single Set 22		Smart Kit 22
						
						
						

Info		Accessory / User guide / Digital media	24
------	---	--	----

Adapter

✓ According to
DIN EN ISO 6789 life test

A "Click" sound when the
demand torque is reached
20,000 clicks guaranteed



Reversible system
30% higher torque for loosening



Principle

"No over tighten" adapter is created from the non-return ratchet torque socket.

It comprised a shaft rod and a shaft cylinder.

A core shaft of shaft rod is sleeved with a mobile ratchet capable of axially moving; the shaft cylinder has a shaft slot formed for being sleeved with the core shaft.

When the core shaft rotates in the shaft slot and the applied torque exceeds the preset torque value, the core shaft idly rotates in the shaft slot.

It means when the demand torque is reached, continued tightening is no longer to increase the torque on the screw.

- Different connecting and / or driving parts are available on request.
- Torque range is possible from 0.1Nm~18Nm.



Used Scrwdriver
Without Torque




Used Scrwdriver
With Torque

General Use Torque Adapter



- Create your own set, general use for all kits.
- Special torque adapter or torque accuracy $\pm 6\%$ are available on request. Please refer to P12.
- Torque Accuracy : $\pm 10\%$

Parts No.	0-TPK12-EX
N.W.	370g
MOQ	3 kits

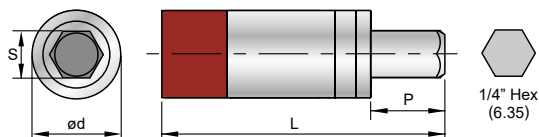

Torque Adapter (A) Ø12 mm

- With * mark is non-stock item. MOQ: 10 boxes.

Parts No.	Nm	Kgfc	In-lb	S (mm)	Ød (mm)	L (mm)	P (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-A06-0.6	0.6	6.1	5.3	DIN 3126 1/4" Hex (6.35mm)	12	38.3	10	3 pcs	80g	
0-TPK-A07-0.9	0.9	9.2	8.0							
0-TPK-A08-1.2	1.2	12.0	10.6							
0-TPK-A08-2.0	2.0	20.4	17.7							
0-TPK-A09-1.4	1.4	14.0	12.4							
0-TPK-A09-2.0	2.0	20.4	17.7							
0-TPK-A10-2.0	2.0	20.4	17.7							
0-TPK-A15-3.0	3.0	30.6	26.6							
0-TPK-A20-5.0	5.0	51.0	44.3							
0-TPK-A20-5.5	5.5	56.1	48.7							
0-TPK-A25-5.5	5.5	56.1	48.7	DIN 3126 1/4" Hex (6.35mm)	12	38.3	10	3 pcs	80g	
* 0-TPK-A00-1.0	1.0	10.2	8.8							
* 0-TPK-A00-1.5	1.5	15.3	13.3							
* 0-TPK-A00-2.2	2.2	22.4	19.5							
0-TPK-A00-2.5	2.5	25.5	22.1							
* 0-TPK-A00-3.5	3.5	35.7	31.0							
0-TPK-A00-3.8	3.8	38.7	33.6							
0-TPK-A00-4.0	4.0	40.8	35.4							
0-TPK-A00-4.5	4.5	45.9	39.8							
0-TPK-A00-5.7	5.7	58.0	50.4							

Small Torque Adapter


(STA) Ø10 mm

- With * mark is non-stock item. MOQ: 10 boxes.


Parts No.	Nm	Kgfc	In-lb	S (mm)	Ød (mm)	L (mm)	P (mm)	Q'TY	N.W.	Packaging Illustration
* 0-TPK-STA-0.1	0.1	1.0	0.9	DIN 3126 1/4" Hex (6.35mm)	10	34.5	10	3 pcs	60g	
0-TPK-STA-0.2	0.2	2.0	1.8							
0-TPK-STA-0.3	0.3	3.1	2.7							
0-TPK-STA-0.4	0.4	4.1	3.5							
0-TPK-STA-0.5	0.5	5.1	4.4							
* 0-TPK-STA-0.6	0.6	6.1	5.3							
* 0-TPK-STA-0.7	0.7	7.1	6.2							

Extend Torque Adapter

- Torque range : 6-18Nm
- Various types of connecting and driving design.
- With * mark is non-stock item. MOQ: 30 pcs.
- Torque Accuracy : $\pm 10\%$


6~18
Nm30%
+
Reversible

ETA

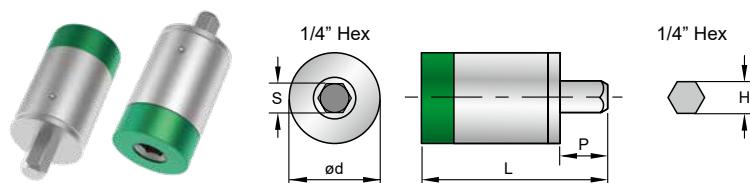


Parts No.	Nm	Kgfcmm	In-lb	Driving S (mm)	Ød (mm)	L (mm)	P (mm)	Connecting H (mm)	Q'TY	N.W.
0-TPK-ETA-6.0	6.0	61.1	53.1	DIN 3126 1/4" Hex	20	43.5	10	DIN 3126 1/4" Hex	1 pc	80g
* 0-TPK-ETA-6.5	6.5	66.2	57.5							
* 0-TPK-ETA-7.0	7.0	71.3	62.0							
0-TPK-ETA-8.0	8.0	81.5	70.8							
0-TPK-ETA-10.0	10.0	101.9	88.5							

ETB

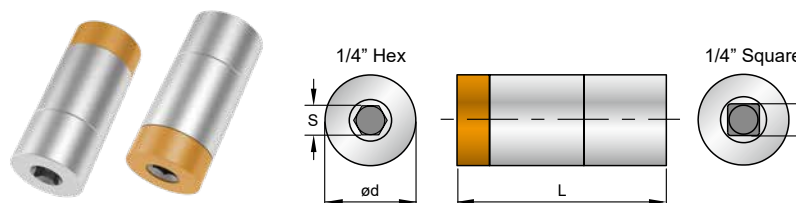

Parts No.	Nm	Kgfcmm	In-lb	Driving S (mm)	Ød (mm)	L (mm)	P (mm)	Connecting H (mm)	Q'TY	N.W.
0-TPK-ETB-8.0	8.0	81.5	70.8	DIN 3126 1/4" Hex	20	44.5	--	DIN 3120 1/4" Square	1 pc	100g
0-TPK-ETB-10.0	10.0	101.9	88.5							
0-TPK-ETB-12.0	12.0	122.3	106.2							
* 0-TPK-ETB-15.0	15.0	152.9	132.8							
* 0-TPK-ETB-18.0	18.0	183.4	159.3							

ETC

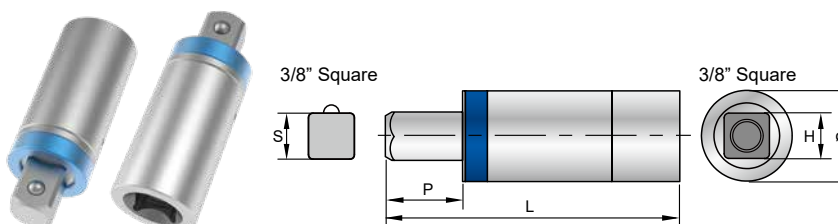

Parts No.	Nm	Kgfcmm	In-lb	Driving S (mm)	Ød (mm)	L (mm)	P (mm)	Connecting H (mm)	Q'TY	N.W.
0-TPK-ETC-8.0	8.0	81.5	70.8	DIN 3122/ DIN 3123 3/8" Square	20	53.0	12	DIN 3120 3/8" Square	1 pc	90g
0-TPK-ETC-10.0	10.0	101.9	88.5							
0-TPK-ETC-12.0	12.0	122.3	106.2							
* 0-TPK-ETC-15.0	15.0	152.9	132.8							
* 0-TPK-ETC-18.0	18.0	183.4	159.3							


Mini Torque Adapter



- Torque range : 10-70cNm
- Adapter diameter is only 8mm.
- Torque Accuracy : $\pm 10\%$

A total solution for applications below

- Fine Cutting Tool
- Communication Devices
- Consumer Electronics
- Drones/UAV
- Smart Phones
- Printed Circuit Boards
- Watches

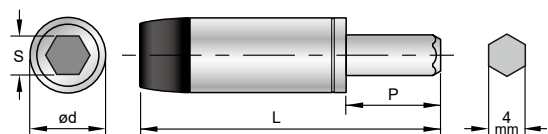

Parts No.	cNm	KgfcM	In-lb	S (mm)	Ød (mm)	L (mm)	P (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-MTA-0.1	10	1.0	0.9	4mm Hex	8	32	10	3 pcs	35g	
0-TPK-MTA-0.2	20	2.0	1.8							
0-TPK-MTA-0.3	30	3.1	2.7							
0-TPK-MTA-0.4	40	4.1	3.5							
0-TPK-MTA-0.5	50	5.1	4.4							
0-TPK-MTA-0.6	60	6.1	5.3							
0-TPK-MTA-0.7	70	7.1	6.2							


Mini Torque Adapter Kit

Parts No.	0-TPK-MTA-DEMO
N.W.	200g
MOQ	3 kits



Transform normal screwdriver to torque screwdriver

- SLOKY mini torque adapter fits almost any kinds of the 4mm bits and handle with $\varnothing 4$ mm in the market.

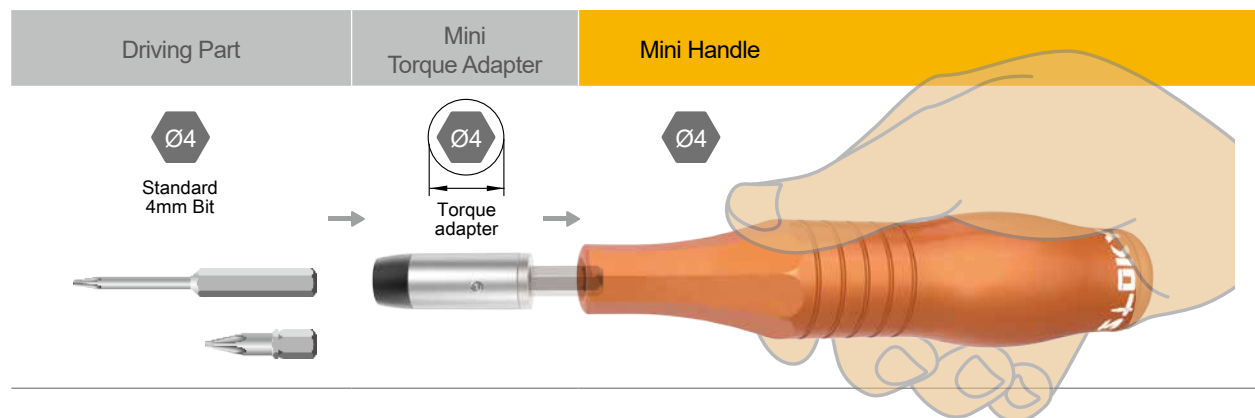


E6.3 Quick Change Torque Adapter



E6.3 Torque Adapter (PTEQ)

- With quick change design.
- Speed limits below 250 r.p.m.
- Further tightening by hand to reach required torque.
- Shorten tightening job for long screws or very many screws, and identical torque controlled.
- Torque Accuracy : $\pm 10\%$

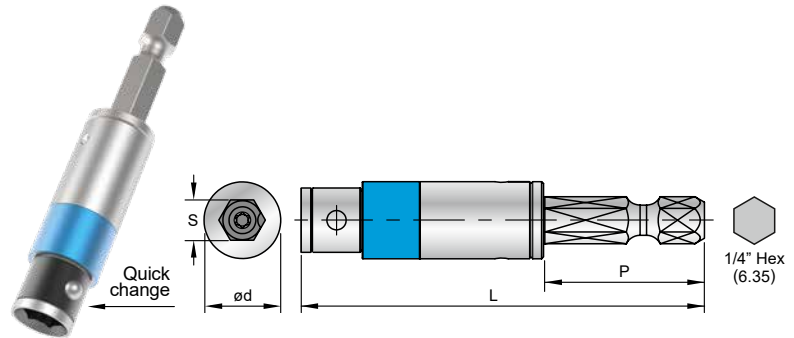


Parts No.	Nm	KgfcM	In-lb	S (mm)	Ød (mm)	L (mm)	P (mm)	Q'TY	N.W.
0-TPK-PTEQ-6.3-2.0	2.0	20.4	17.7	DIN 3126 1/4" Hex	12	62.7	25	1 pc	35g
0-TPK-PTEQ-6.3-3.0	3.0	30.6	26.6						
0-TPK-PTEQ-6.3-4.5	4.5	45.9	39.8						
0-TPK-PTEQ-6.3-5.0	5.0	51.0	44.3						

5in1 Multi-Torque Adapter



2, 3, 4, 5, 6Nm

- Visually define torque value on adapter.
- Universal type, 5 in 1 torque control from 2Nm to 6Nm.
- No more over or under tightening on your screw.
- Easy to use for multiple torque requirements.
- Not for loosening.

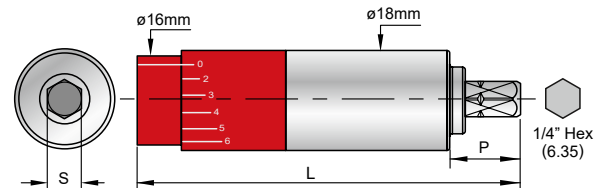

Parts No.	Nm	KgfcM	In-lb	S (mm)	Ød (mm)	L (mm)	P (mm)	Q'TY	N.W.
0-TPK-5IN1-6.0	2.0	20.4	17.7	DIN 3126 1/4" Hex	18	68.8	10	1 pc	105g
	3.0	30.6	26.6						
	4.0	40.8	35.4						
	5.0	51.0	44.3						
	6.0	61.1	53.1						

* Other torque range is available on request, max. torque 10Nm.

5in1 Multi Torque Adapter Kit

Parts No.	0-TPK-5IN1-H03
N.W.	220g



- Before use, confirm tool is at the "0" setting.
- Turn the handle clockwise, until the required torque is aligned with datum line.

Datum line






Special Inquiry

Please send your inquiry to sloky@jimmore.com.tw

► Company

► Phone / Email

Adapter Diameter	ØD	mm	
	Torque Range	Fig	
Ø 8mm Ø10mm	0.1 ~ 0.7 Nm	1 , 2	
Ø12mm	0.6 ~ 6.0 Nm	3 , 4	
Ø20mm	6.0 ~ 18.0 Nm	5 , 6 , 7	
Specification (Fig)	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7		
Required Torque	Nm		
Torque Tolerance	<input type="checkbox"/> ±6% <input type="checkbox"/> ±10%		
L Overall Length	mm		
Connecting Part			
DIN ISO Standard			
Type	<input type="checkbox"/> C type  <input type="checkbox"/> E type  <input type="checkbox"/> Other		
H (Connecting Head)	<input type="checkbox"/> Male <input type="checkbox"/> Female <input type="checkbox"/> Hex <input type="checkbox"/> Square		
Size	_____ mm/inch E.g. 1/4", 3/8", 1/2".....		
P (Connecting Length)	mm		
Driving Part			
DIN ISO Standard			
S (Driving Head)	<input type="checkbox"/> Male <input type="checkbox"/> Female <input type="checkbox"/> Hex <input type="checkbox"/> Square		
Depth Overall Length	mm		
Size	_____ mm/inch E.g. 1/4", 3/8", 1/2".....		
Quick Change	<input type="checkbox"/> Yes <input type="checkbox"/> No		

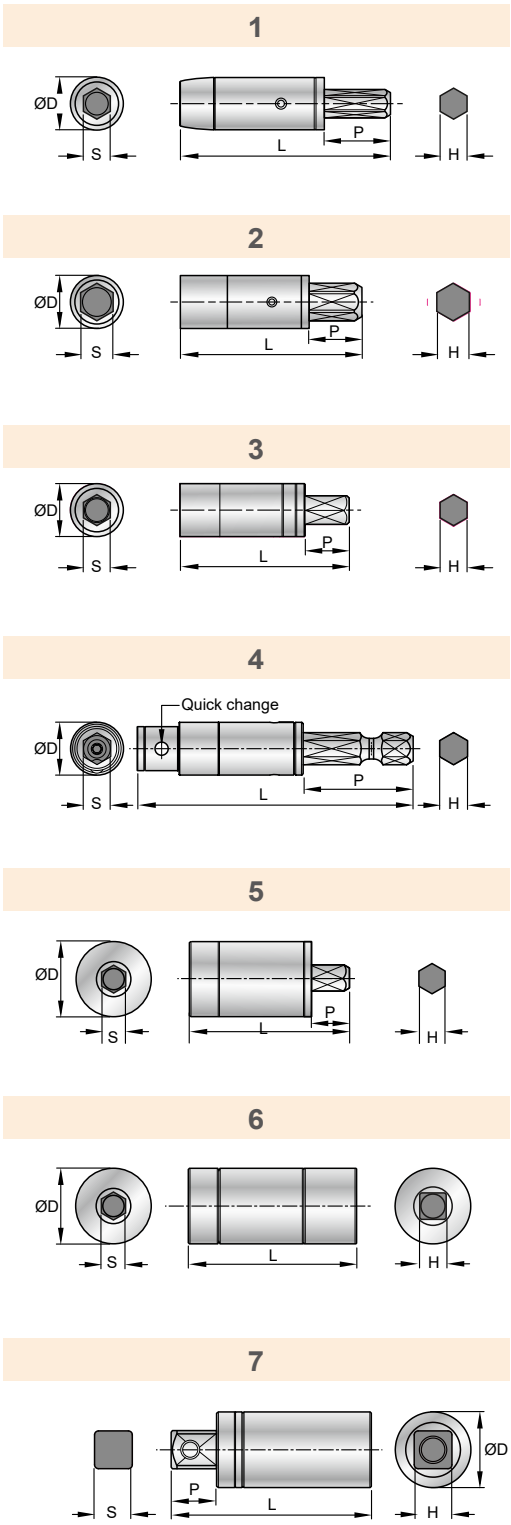

Adapter

Handle




Features

We offer **4** different types of handle to cover all torque adapters.

The soft zone is comfortable to hold and play very flexible.

Easy to tighten and loosen screws even in higher torque range.

The outstanding design of the SLOKY handle that fits perfectly into the hand and prevents the hand injuries such as blisters and calluses.

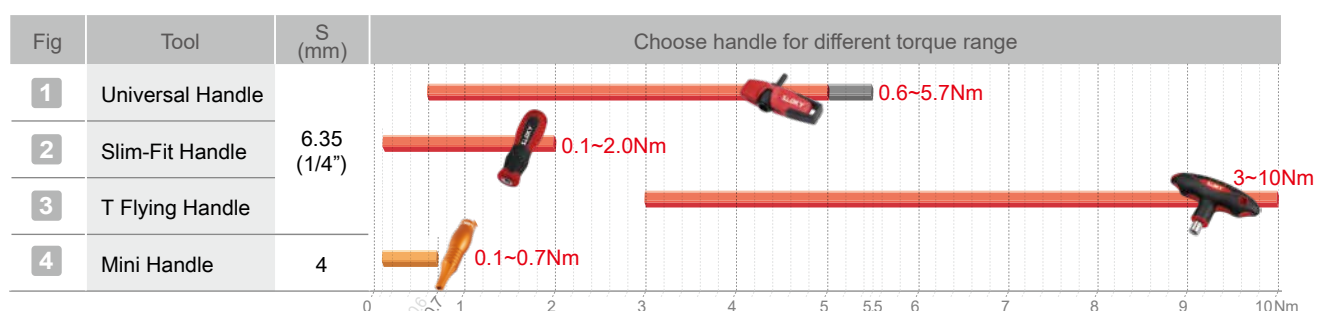



Universal Handle

Features

- Universal type for holding in multi-ways.
- Having large support surfaces for thumb and index finger ease of use and efficiency.
- Remaining the advantages of flag design, driving the screw easily.




Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	H (mm)	Ød (mm)	N.W.
1	0-TPK-H01	0.6~5.7 Nm	Red	6.35 (1/4")	37.5	70.7	5	25g
	0-TPK-H01-B		Blue					

Slim-Fit Handle

Features

- Comfortable holding, for accurate and efficient while fastening and loosening small size screws.

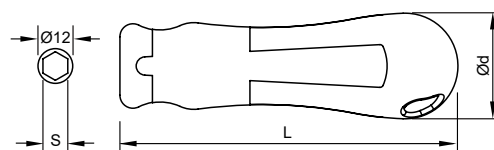


Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	Ød (mm)	N.W.
2	0-TPK-H02	0.1~2.0 Nm	Red	6.35 (1/4")	104	32.5	50g
	0-TPK-H02-B		Blue				

T Flying Handle

Features

- It is light, even it is designed for higher torque.
- The striking soft zone that allows particularly comfortable, best handle for using at higher torque.




Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	H (mm)	N.W.
3	0-TPK-H03	3.0~10.0 Nm	Red	6.35 (1/4")	65	100	60g
	0-TPK-H03-B		Blue				

Mini Handle

Features

- Aluminum Alloy made.




Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	Ød (mm)	N.W.
4	0-TPK-H05	10~70 cNm (0.1~0.7 Nm)	Orange	4	85	20	70g

Bits



TORX®



TORX PLUS®



HEXAGON



Tools created from ideas

TX20 / 20IP / H4
TX25 / 25IP / H5

TX15 / 15IP / H3

TX10 / 10IP / H2.5

TX9 / 9IP

TX8 / 8IP / H2

TX7 / 7IP

TX6 / 6IP / H1.5

Color Identity

No mistake!

The color identification is visible on both adapters and bits.

Select suitable torque size by color management system indicated on torque adapters and bits.


It is to enhance the convenience of using and delivery proper tightening torque.



Rapid-out
Simply pull the bit outward to change new bit

Spare-TORX®


Hardness : HRC 58° ~ 60°
Material : High alloy steel

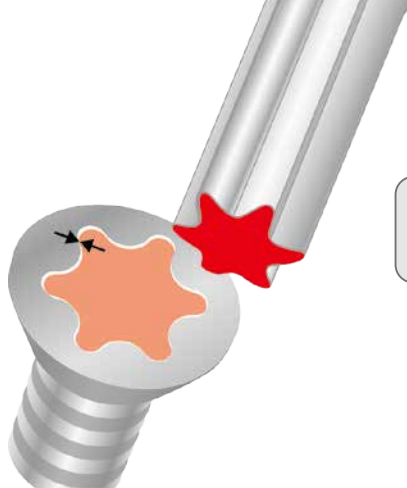

TORX®

25mm Bits for TORX® screws


Standard : DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B01-TX06-25	TX6	25	6 pcs	32 g	
0-TPK-B01-TX07-25	TX7			32 g	
0-TPK-B01-TX08-25	TX8			32 g	
0-TPK-B01-TX09-25	TX9			32 g	
0-TPK-B01-TX10-25	TX10			32 g	
0-TPK-B01-TX15-25	TX15			34 g	
0-TPK-B01-TX20-25	TX20			34 g	

50mm Bits for TORX® screws


Standard : DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B01-TX06-50	TX6	50	6 pcs	54 g	
0-TPK-B01-TX07-50	TX7			54 g	
0-TPK-B01-TX08-50	TX8			54 g	
0-TPK-B01-TX09-50	TX9			56 g	
0-TPK-B01-TX10-50	TX10			58 g	
0-TPK-B01-TX15-50	TX15			60 g	
0-TPK-B01-TX20-50	TX20			62 g	
0-TPK-B01-TX25-50	TX25			62 g	

75mm Bits for TORX® screws

Standard : DIN3126 – C6.3 (1/4")




Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B01-TX08-75	TX8	75	6 pcs	58 g	
0-TPK-B01-TX09-75	TX9			64 g	
0-TPK-B01-TX10-75	TX10			70 g	
0-TPK-B01-TX15-75	TX15			70 g	
0-TPK-B01-TX20-75	TX20			78 g	
0-TPK-B01-TX25-75	TX25			88 g	

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.


Spare-TORX PLUS®

Hardness : HRC 58° ~ 60°
Material : High alloy steel

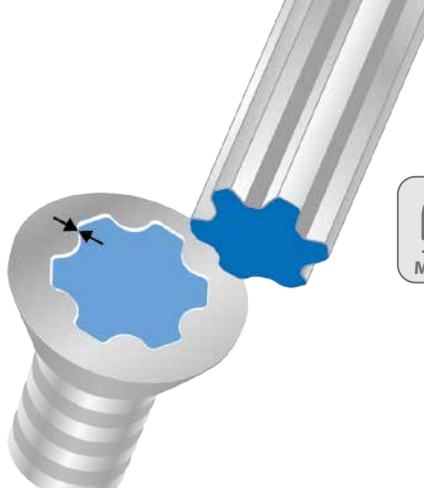

25mm Bits for TORX PLUS® screws


Standard : DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B02- 6IP-25	6IP	25	6 pcs	32 g	
0-TPK-B02- 7IP-25	7IP			32 g	
0-TPK-B02- 8IP-25	8IP			32 g	
0-TPK-B02- 9IP-25	9IP			32 g	
0-TPK-B02-10IP-25	10IP			32 g	
0-TPK-B02-15IP-25	15IP			34 g	
0-TPK-B02-20IP-25	20IP			34 g	

50mm Bits for TORX PLUS® screws

Standard : DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B02- 6IP-50	6IP	50	6 pcs	54 g	
0-TPK-B02- 7IP-50	7IP			54 g	
0-TPK-B02- 8IP-50	8IP			54 g	
0-TPK-B02- 9IP-50	9IP			56 g	
0-TPK-B02-10IP-50	10IP			58 g	
0-TPK-B02-15IP-50	15IP			60 g	
0-TPK-B02-20IP-50	20IP			62 g	
0-TPK-B02-25IP-50	25IP			66 g	

75mm Bits for TORX PLUS® screws

Standard : DIN3126 – C6.3 (1/4")





Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B02- 8IP-75	8IP	75	6 pcs	64 g	
0-TPK-B02- 9IP-75	9IP			66 g	
0-TPK-B02-10IP-75	10IP			72 g	
0-TPK-B02-15IP-75	15IP			72 g	
0-TPK-B02-20IP-75	20IP			78 g	
0-TPK-B02-25IP-75	25IP			86 g	

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.

Spare - HEXAGON

Hardness : HRC 58° ~ 60°
Material : High alloy steel

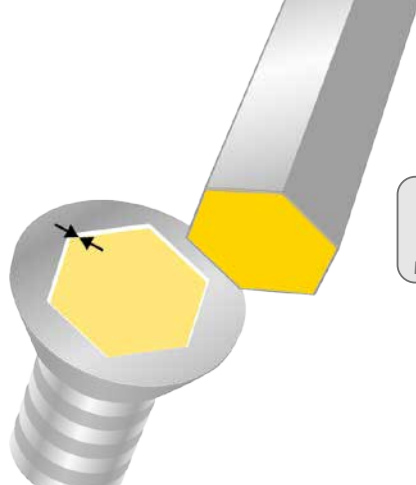


25mm Bits for HEXAGON screws

Standard : DIN3126 – C6.3 (1/4")

Parts No.	Driver Size	H (mm)	G (mm)	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B03-H015-25	H1.5	1.5	2.3			32 g	
0-TPK-B03-H020-25	H2	2.0	3.0			32 g	
0-TPK-B03-H025-25	H2.5	2.5	3.8			33 g	
0-TPK-B03-H030-25	H3	3.0	4.5			34 g	
0-TPK-B03-H040-25	H4	4.0	6.0			36 g	
0-TPK-B03-H050-25	H5	5.0	7.5			40 g	
				25	6 pcs		

50mm Bits for HEXAGON screws

Standard : DIN3126 – C6.3 (1/4")

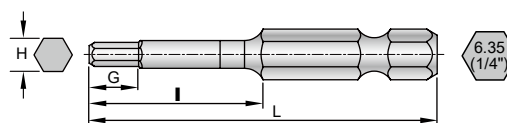

Parts No.	Driver Size	H (mm)	G (mm)	I (mm)	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B03-H015-50	H1.5	1.5	2.3				50 g	
0-TPK-B03-H020-50	H2	2.0	3.0				51 g	
0-TPK-B03-H025-50	H2.5	2.5	3.8				54 g	
0-TPK-B03-H030-50	H3	3.0	4.5				57 g	
0-TPK-B03-H040-50	H4	4.0	6.0				64 g	
0-TPK-B03-H050-50	H5	5.0	7.5				72 g	
				25	50	6 pcs		

HEXAGON

Pro Station






All-in-One **TORX®** **TORX PLUS®** **HEXAGON** tools for professional using

- Easy to store and pick up
- Cover popular torque from 0.6Nm to 5.5Nm
- A prefect tool set for every station of production line.

Parts No.	0-TPK26-PR-22K
N.W.	1,600g



Handle	Contents									
	Adapter				★ 50mm		⚙ 50mm		⬡ 50mm	
	Nm	Kgfcmm	In-lb	Q'TY	Size	Q'TY	Size	Q'TY	Size	Q'TY
 TPK-H02-B	0.6	6.1	5.3	1 pc	TX6	1 pc	6IP	1 pc	H1.5	1 pc
	0.9	9.2	8.0		TX7		7IP		-	-
	1.2	12.0	10.6		TX8		8IP		H2	1 pc
 TPK-H01-B	1.4	14.0	12.4		TX9		9IP		-	-
	2.0	20.4	17.7		TX10		10IP		H2.5	1 pc
	3.0	30.6	26.6		TX15		15IP		H3	
 TPK-H03-B	5.0	51.0	44.3		TX20		20IP		H4	
	5.5	56.1	48.7		TX25		25IP		H5	

Tool stand

- Good for storage and workbench.
- Tool stand is made of aluminum alloy, silver coating.

Parts No.	0-TPK26-PR
N.W.	1,000g
Dimension	W170 x D120 x H30mm




Togo Kit

Collecting the most popular torque tools
Ready to go.




Togo Kit


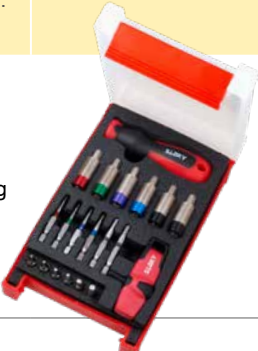





Torque Screwdriver Kit for **TORX®**, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	KgfcM	In-lb	25mm+50mm		
0-TPK01-TGTX-12K	TPK-H02	TX6	0.6	6.1	5.3	1 pc + 1 pc	445g	
		TX7	0.9	9.2	8.0			
		TX8	1.2	12.0	10.6			
	TPK-H01	TX9	1.4	14.0	12.4			
		TX10	2.0	20.4	17.7			
		TX15	3.0	30.6	26.6			

Torque Screwdriver Kit for **TORX PLUS®**, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	KgfcM	In-lb	25mm+50mm		
0-TPK02-TGIP-12K	TPK-H02-B	6IP	0.6	6.1	5.3	1 pc + 1 pc	445g	
		7IP	0.9	9.2	8.0			
		8IP	1.2	12.0	10.6			
	TPK-H01-B	9IP	1.4	14.0	12.4			
		10IP	2.0	20.4	17.7			
		15IP	3.0	30.6	26.6			

Torque Screwdriver Kit for **HEXAGON**, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter				Bit			
		Size	Nm	KgfcM	In-lb				
0-TPK03-TGHX-12K	TPK-H02		H1.5	0.6	6.1	5.3	1 pc + 1 pc	445g	
			H2.0	1.2	12.0	10.6			
			H2.5	2.0	20.4	17.7			
	TPK-H01		H3.0	3.0	30.6	26.6			
			H4.0	5.0	51.0	44.3			
			H5.0	5.5	56.1	48.7			








TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.








Work Station

For your long time using
and storage.








Torque Screwdriver Kit for TORX®, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter				Bit			
		Size	Nm	KgfcM	In-lb	25mm+50mm			
0-TPK01-PR-12	TPK-H02		TX6	0.6	6.1	5.3	1 pc + 1 pc	855g	
			TX7	0.9	9.2	8.0			
			TX8	1.2	12.0	10.6			
	TPK-H01		TX9	1.4	14.0	12.4			
			TX10	2.0	20.4	17.7			
			TX15	3.0	30.6	26.6			

Torque Screwdriver Kit for TORX PLUS®, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter				Bit			
		Size	Nm	KgfcM	In-lb	25mm+50mm			
0-TPK02-PR-12	TPK-H02-B		6IP	0.6	6.1	5.3	1 pc + 1 pc	855g	
			7IP	0.9	9.2	8.0			
			8IP	1.2	12.0	10.6			
	TPK-H01-B		9IP	1.4	14.0	12.4			
			10IP	2.0	20.4	17.7			
			15IP	3.0	30.6	26.6			

Torque Screwdriver Kit for HEXAGON, 25mm+50mm Bits








Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter				Bit			
		Size	Nm	KgfcM	In-lb				
0-TPK03-PR-12	TPK-H02		H1.5	0.6	6.1	5.30	1 pc + 1 pc	855g	
			H2.0	1.2	12.0	10.6			
			H2.5	2.0	20.4	17.7			
	TPK-H01		H3.0	3.0	30.6	26.6			
			H4.0	5.0	51.0	44.3			
			H5.0	5.5	56.1	48.7			

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.

Smart Kit

Cover 0.6Nm to 5.5Nm adapters
with one universal handle.

Torque Screwdriver Kit for TORX®, 25mm Bits

Parts No.	Contents						N.W.	Metric Screw	Packaging Illustration	
	Handle	Adapter				Bit				
		Size	Nm	KgfcM	In-lb	25mm				
0-TPK01-99-06K	TPK-H01		TX6	0.6	6.1	5.3	1 pc	290g	M1.8 M2	
			TX7	0.9	9.2	8.0			M2 M2.2	
			TX8	1.2	12.0	10.6			M2.2 M2.5	
			TX9	2.0	20.4	17.7			M3 M3.5	
			TX15	3.0	30.6	26.6			M3.5 M4	
			TX20	5.5	56.1	48.7			M5 M5.5	

* Smart Kit for **TORX PLUS®** is available on request, Part No. 0-TPK01-99-06K-B.

Single Set | Economical Starter

Torque Screwdriver Single Set for TORX®, 25mm+50mm Bits




Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter			Bit				
		Nm	KgfcM	In-lb	Size	25mm+50mm			
0-TPK01-TX06-0.6-S	TPK-H02		0.6	6.1	5.3	TX6	2 pcs + 2 pcs	122g	
0-TPK01-TX07-0.9-S			0.9	9.2	8.0	TX7			
0-TPK01-TX08-1.2-S			1.2	12.0	10.6	TX8			
0-TPK01-TX08-2.0	TPK-H01		2.0	20.4	17.7	TX8	2 pcs + 2 pcs	130g	
0-TPK01-TX09-1.4			1.4	14.0	12.4	TX9			
0-TPK01-TX09-2.0			2.0	20.4	17.7				
0-TPK01-TX10-2.0			2.0	20.4	17.7	TX10			
0-TPK01-TX15-3.0			3.0	30.6	26.6	TX15			
0-TPK01-TX20-5.0			5.0	51.0	44.3	TX20			
0-TPK01-TX20-5.5			5.5	56.1	48.7	TX20			
0-TPK01-TX2025-5.5	TPK-H03		5.5	56.1	48.7	TX20	2 pcs	200g	
						TX25	2 pcs		

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.




Single Set | Economical Starter

Single Set

Torque Screwdriver Single Set for TORX PLUS®, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter			Bit				
		Nm	KgfcM	In-lb	Size	25mm+50mm			
0-TPK02- 6IP-0.6-S	TPK-H02-B		0.6	6.1	5.3	6IP	2 pcs + 2 pcs	130g	
0-TPK02- 7IP-0.9-S			0.9	9.2	8.0	7IP			
0-TPK02- 8IP-1.2-S			1.2	12.0	10.6	8IP			
0-TPK02- 9IP-1.4	TPK-H01-B		1.4	14.0	12.4	9IP	2 pcs + 2 pcs	130g	
0-TPK02-10IP-2.0			2.0	20.4	17.7	10IP			
0-TPK02-15IP-3.0			3.0	30.6	26.6	15IP			
0-TPK02-20IP-5.0			5.0	51.0	44.3	20IP			
0-TPK02-2025IP-5.5	TPK-H03-B		5.5	56.1	48.7	20IP	2 pcs	200g	
						25IP	2 pcs		

Torque Screwdriver Single Set for HEXAGON, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration	
	Handle	Adapter			Bit				
		Nm	KgfcM	In-lb	Size	25mm+50mm			
0-TPK03-H020-1.2	TPK-H02		1.2	12.0	10.6	H2	2 pcs + 2 pcs	150g	
0-TPK03-H025-2.0	TPK-H01		2.0	20.4	17.7	H2.5	2 pcs + 2 pcs	135g	
0-TPK03-H030-3.0			3.0	30.6	26.6	H3			
0-TPK03-H040-5.0	TPK-H03		5.0	51.0	44.3	H4	Bit 50mm 4 pcs	200g	

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.

Accessory

Accessories that are compatible with SLOKY torque screwdrivers.

Torque Analyzer

- Made in Japan

Parts No.	08-CD-100M
N.W.	1,000g
Dimension	W160 × D125 × H55mm




Model No.		CD-100M
Measuring Range	Nm	0.10~10.00
	kgf-cm	1.0~100.0
	lbf-in	1.0~90.0
Accuracy		±0.5% (199 or less digit ± 1 digit)
Display		The 3.5 figures digital display of LCD
Measurement Mode	P-P	The maximum under measurement is always displayed.
	T-R	The value of the load torque concerning a detector is displayed as it is.
	P-D	A value when a load torque value changes from a rise to descent is displayed.
Transmission interface		USB (Baud rate : 19200)
Auto Power Off		Power-supply OFF is carried out after the neglect during 10 minutes.
Battery		Ni-cd battery : 1.2V/5sells (700mAh)
Charge time / Use time		About 3 hours / About 12 hours use consecutive at full charge time
Measurement Joint	Spec.	SJ-50
	Measurement Range	0.5~5 Nm

3 Seats Magnet Tool Stand

- Quick and fix on anywhere with metal surface.
- Acrylic material with magnet support up to 1kg.
- All SLOKY screwdrviers can be fit with.

Parts No.	0-TPK-03S
N.W.	100g
Dimension	W110 x D55 x H50mm

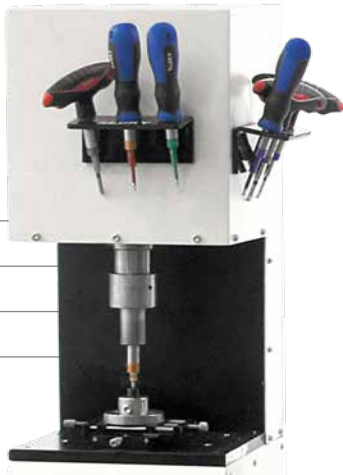

★ Not include torque screwdriver

User Guide

Why the torque may get low after using a certain time?

The torque adapter is functional by the radial direction friction. It is different from the marketed product nowadays. When an object slips or is going to slip with another object, on the two contact faces will create a relative action. This relative action is called the static friction. It creates the abrasion after using a certain time. Thus, the preset torque adapter may get low due to this abrasion.

How to judge?

- $\pm 10\%$ allowance for torque adapter is acceptable.
- Please check it on torque analyzer or measurement.




Warning

Tightened screws with unknown torque



Do not use Sloky torque screwdriver to loosen tightened screws with unknown torque.

The tips of using different handle

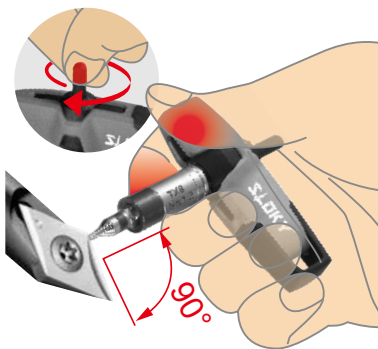

Large support areas for thumb and index finger on the ergonomically shaped handles.

The transmission of high torque is thus quite simple. Cylindrical handle shaft for quick turning of screws.



Please be mind that bit and screw head must be angled 90 degree.



The Slim Fit handle has been designed to fit snugly in your hand, making blisters and calluses a thing of the past, even after intensive use.

The handle hard zones allows the hand to easily glide during hand repositioning.

The soft zones ensures full force transfer through the grip.



The T Flying handle is needed whenever particularly high torque for loosening or tightening jobs needs to be applied.

The power is transferred positively, there is no frictional loss between the hand and the handle.

Digital Media

Youtube



Linkedin



Product Introduction



Catalog



Custom Design
Medical & Public Safety Application
Construction Application
Industrial Application
Leisure Application

...



SLOKY[®]
Smart Torque
Everywhere
Possible



Where there is **SLOKY[®]**,
there is quality.



ТОВ "ФРАКТАЛЬНІСТЬ"
Наші контакти:
вул. Машинобудівна, 46, 03067, Київ
факс: +38 044 394-80-94
e-mail: office@fractalnost.com.ua
www.fractalnost.com.ua