


# DC Slim Chuck

## ► Extension Adaptor >>

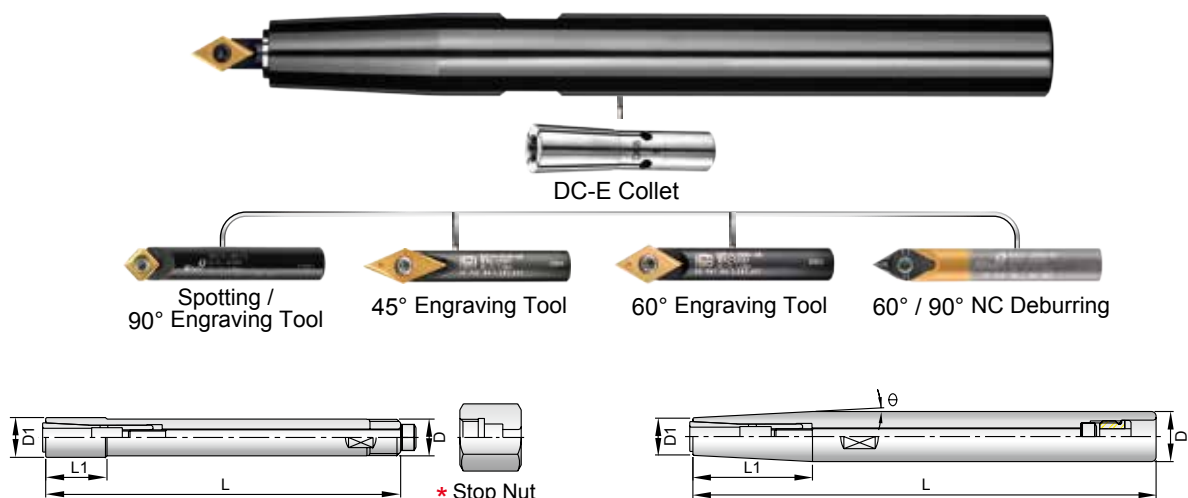


Parts No.	Type of Holder	d	L	L1	øD	D1	θ	Collet	Back Screw	Stop Screw	Hexagon Key	Stop Nut
0-329090-102	ST10-DC4-90	2~4	90	14	10	9	--	DC4	M4 * L60	--	0-301940~632	TP-M8
-112	ST12-DC4-120	2~4	120	38	12	9	3°		M4 * L85	OP-M8		
0-329090-212	ST12-DC6-120	2~6	120	40	12	14	--	DC6	M5 * L95	--	0-301940~642	TP-M12
-222	ST16-DC6-150	2~6	150	38	16	14	3°		M5 * L100	OP-M10		
-232	ST20-DC6-200	2~6	200	70	20	14	3°		M5 * L100	OP-M10		
-242	ST25-DC6-250	2~6	250	115	25	14	3°		M5 * L100	OP-M10		
0-329090-322	ST20-DC8-200	3~8	200	28	20	19	2°	DC8	M6 * L120	OP-M12	0-301940~652	--
0-329090-432	ST25-DC10-250	4~10	250	28	25	24	2°	DC10	M8 * L150	OP-M16	0-301940~662	--

\* Stop nut is applied when clamping and unclamping tools.

## ► DC-E Collet >>

- The design of DC-E collets is emphasized on increasing the clamping force of end mills.

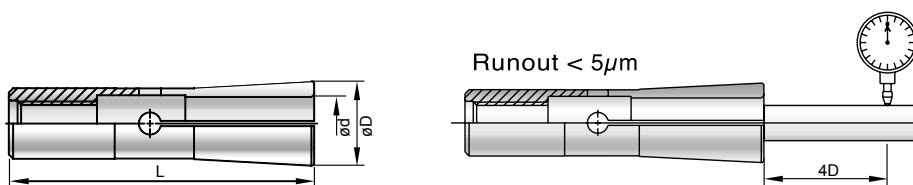

Type	DC-4E		DC-6E		DC-8E		DC-10E	
D	7		9.6		15		19.1	
L	31		36		45		52	
DC4-E		DC6-E		DC8-E		DC10-E		
Parts No.	Size(mm)	Parts No.	Size(mm)	Parts No.	Size(mm)	Parts No.	Size(mm)	
0-300090-102	2.0	0-300090-203	3.0	0-300090-303	3.0	-	-	
0-300090-103	3.0	0-300090-204	4.0	0-300090-304	4.0	0-300090-404	4.0	
0-300090-104	4.0	0-300090-206	6.0	0-300090-306	6.0	0-300090-406	6.0	
				0-300090-308	8.0	0-300090-408	8.0	
						0-300090-410	10.0	

6

Accessory